


Pulse

Carpet Tiles



190 Cobalt




610 Ecrú



910 Pebble




920 Taupe




930 Cadet




940 Cedar




950 Zinc



970 Onyx



980 Obsidian

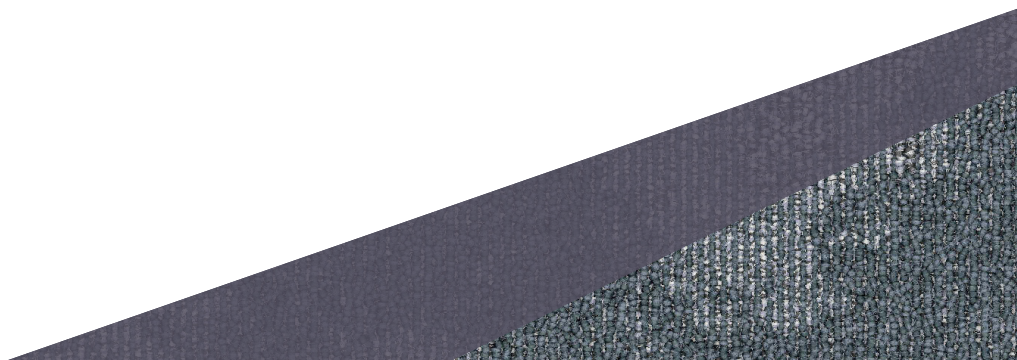

Core

Carpet Tiles



190 Midnight



605 Bay



910 Silver



932 Slate



937 Latte



970 Umber




980 Coffee



992 Graphite




995 Ebony

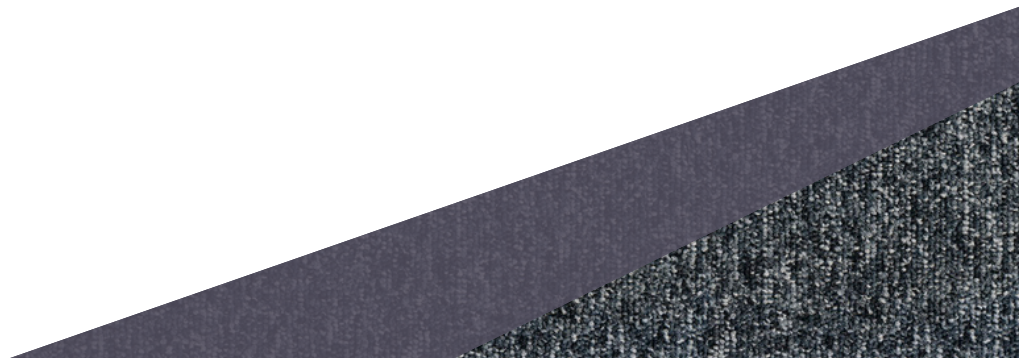

Edge

Carpet Tiles



190 Wave




610 Ochre



910 Ash




920 Mink




930 Horizon




940 Plaza




950 Smoke



970 Shadow



980 Carbon

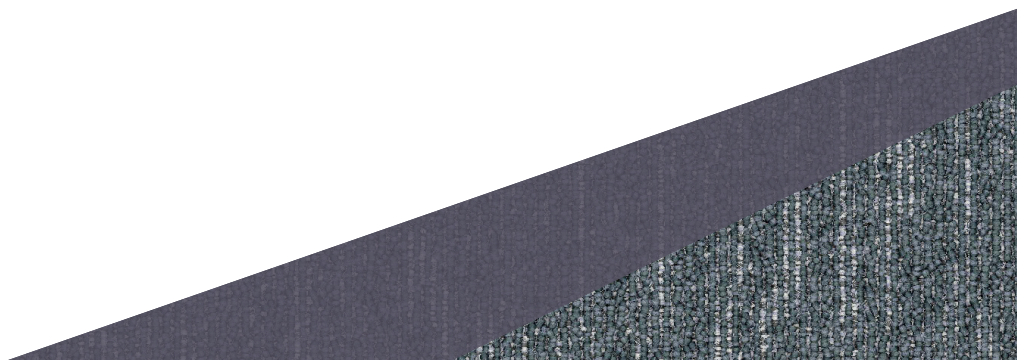

Pulse, Core & Edge

Construction		Structured Loop Pile
Backing		Bitumen
Tile Size		50cm x 50cm
Wear Classification	EN1307	33 (Heavy Commercial)
Antistatic	ISO 6356	≤2kv
Fire Classification	ISO 13501-1	Bfl-s1
Fastness to Light	ISO 105-B02	>7
Pile Content	ECONYL®	100% Solution Dyed Nylon
Castor Chair		Pass

		PULSE	CORE	EDGE
Thermal Conductivity	BS 4745	<0.093 C/W	<0.145 C/W	<0.093 C/W
Pile Weight		620g/m ²	580g/m ²	620g/m ²
Total Weight		4105g/m ²	4200g/m ²	4105g/m ²
Pile Height		3.2mm	2.6mm	3.2mm
Total Height		6.5mm	5.8mm	6.5mm
Sound Absorbtion	EN ISO 354	24db	26db	24db

